

SOLUTIONS





A Rich Heritage

With over 40 years' experience, Noaw is a leading manufacturer of professional slicing machines. It's Italian manufacturing facility is equipped with the most technologically advanced production machinery and processes so as to guarantee the highest quality and reliability of slicers available.

The Company's mission focuses on the quality of production and an in-depth understanding of end-user needs. This provides a solid foundation from which Noaw delivers the most innovative solutions for every slicing need.

Roband Australia has represented Noaw throughout Australasia for more than 20 years. With more than 50 years' experience in the manufacture and supply of foodservice equipment, Roband Australia fully supports the Noaw product portfolio and provides a full range of spare parts and service agents for the range throughout the region. Plexiglass hi-visibility safety guard (CE approved plexiglass).

Precise cut thickness adjustment. Built in sharpening head with metal guard.

Finest quality steel alloys C45 and 100Cr6 are used in Noaw blades. All blades are hardened, tempered and electronically balanced. They are chrome plated to resist corrosion.

Blade ring-guard for safety protection.

All Noaw slicers disassemble without the need of tools for easy cleaning.

Premium aluminium alloy used providing outstanding robust construction.

Secure feet to eliminate body movement during operation.



NSI

Carriage handle on HD models.

12131413



Fully Automatic Slicer - Heavy Duty

- Fully automatic or manual operation
- Intuitive control panel providing variable blade speed, carriage speed & carriage length
- Pre-selection of slice quantity desired
- Belt driven



The fully automatic gravity feed belt driven slicer takes the hard work out of slicing. It is fast, clean, precise and very easy to operate and features two independent motors, one for blade rotation and the other for carriage movement.

The intuitive touch control panel allows for the selection of the number of cuts required as well as multiple options for the blade speed, carriage speed and the length of the carriage movement allowing you total control over the quality of your cuts with efficient operation. The machine can also be used in manual mode if required.

Manufactured from anodized aluminium with clean lines, the slicer features a built-in sharpening head and blade ring-guard. The clever design enables quick disassembly for cleaning, without the need for tools.

The NS350HDA is suited to large restaurants, supermarkets, delicatessens and butcher shops where high volume slicing of a variety of meat types is required and precise control of the automatic slicing feature is necessary.

Optional model NS350HDX available with factory fitted speedy blade remover device to ensure absolute safety should the blade ever need to be removed for maintenance. See features on page 9.



Semi-Automatic Slicer - Heavy Duty

- Semi-automatic or manual operation
- Control panel with basic variable selection of carriage speed and length of cut
- Belt driven



Model NS350HDS

Blade Diameter Height of Cut Length of Cut Slice Thickness Blade Speed Angle of Feed Motor Power Net Weight 350 mm 230 mm 250 mm 0 - 14 mm 300 RPM 52° 390 Watts 46 kg

The semi-automatic gravity feed belt driven slicer is designed for volume cutting and features two independent motors, one for blade rotation and the other for carriage movement. The slicer can be used either manually or with automatic operation. In the automatic mode, 3 carriage movement lengths can be selected to suit the size of the product and three carriage speeds can be selected to suit the delicacy of food being sliced.

Manufactured from anodized aluminium with clean lines, the slicer features a built-in sharpening head and blade ring-guard. The clever design enables quick disassembly for cleaning, without the need for tools.

The NS350HDS is suited to large restaurants, supermarkets, delicatessens and butcher shops where high volume slicing is required for different varieties of meats.





Manual Gravity Feed Gear Driven Slicer - Heavy Duty

- Manual carriage operation
- Ideal for heavy loads like cheese and for high volume output
- Gear driven

Model NS350HDG

| Blade Diameter | 350 mm |
|-----------------|-----------|
| Height of Cut | 250 mm |
| Length of Cut | 365 mm |
| Slice Thickness | 0 - 22 mm |
| Blade Speed | 210 RPM |
| Angle of Feed | 52° |
| Motor Power | 370 Watts |
| Net Weight | 42 kg |
| | |



The gravity feed gear driven slicer has been designed to effortlessly handle heavy loads like cheese, bacon and meat that might cause slipping of a belt driven machine.

Manufactured from anodized aluminium with clean lines, the machine features a built-in sharpening head and blade ring-guard.

An ideal machine for high volume work required of large restaurants, supermarkets, delicatessen's and butcher shops.

Manual Vertical Slicer

- Vertical blade positioning and horizontal meat carriage
- Ideal for shaving delicate meat
- Belt driven

Model NS300V

| Blade Diameter | 300 mm | |
|-----------------|-----------|--|
| Height of Cut | 210 mm | |
| Length of Cut | 290 mm | |
| Slice Thickness | 0 - 14 mm | |
| Blade Speed | 310 RPM | |
| Angle of Feed | Straight | |
| Motor Power | 370 Watts | |
| Net Weight | 31 kg | |
| | | |



The belt driven vertical slicer has been specifically designed for shaving and slicing delicate cold cured meats. The machine features a double sliding plate with a lockable hand grip sliding on two vertical columns to ensure easy manoeuvrability. The spikes on the plate and meat grip hold the meat securely in place and ensure consistent shaving.

Manufactured from anodized aluminium with clean lines, it has a built-in sharpening head and blade ring-guard. The slicer disassembles quickly without the need of tools for easy cleaning.

Heritage Flywheel Slicer

- A showpiece vertical slicer that is beautifully crafted for easy manual operation
- Ideal for shaving and slicing delicate cold cut meats like prosciutto
- Fully manual operation of the blade

Model NS330M

| Blade Diameter | 330 mm |
|-----------------|----------|
| Height of Cut | 215 mm |
| Length of Cut | 270 mm |
| Slice Thickness | 0 - 4 mm |
| Angle of Feed | Straight |
| Net Weight | 62 kg |

Model NSCIS

Optional cast iron stand. Height 800 mm Table surface 590 mm x 450 mm Net weight 80 kg

With stunning design, the Heritage Flywheel Slicer is a premium quality fully manual slicer producing artisan results. Constructed from stainless steel and aluminium, featuring an alloy steel blade (100Cr6) perfectly balanced and chrome plated, the machines robust construction complements the striking red enamel finish.

The meat table and blade movements are fully co-ordinated and geared to the hand rotation of the flywheel such that one rotation of the flywheel produces multiple turns of the blade. Additionally, as the flywheel turns, the carriage proportionately moves the food being sliced towards the blade. A double sliding plate with a lockable hand grip securely holds the meat in place to ensure consistent shaving.

The machine has been designed with ease of cleaning in mind. The space between the blade and the head is easily accessible to enable regular cleaning. A quick release meat table makes removal easy.

The Heritage Flywheel Slicer is a truly beautiful machine to own and operate.

SLICERS®



Manual Gravity Feed Slicers - Heavy Duty

- Manual carriage movement
- Heavy duty, robust construction for handling large volume and loads
- Belt driven

Three heavy-duty, manual-feed, belt-driven machines are available. With a larger one-piece anodized aluminium base and the use of more robust components, the machines are designed for handling larger volumes. Featuring a built in sharpening head and blade ring-guard, the machines are also easy to disassemble without tools for thorough cleaning.

This series is designed for larger delis, restaurants and supermarkets and will slice all types of meat for long periods with ease and offer many years of dependable service.

Model NS250HD

| Blade Diameter | 250 mm |
|-----------------|-----------|
| Height of Cut | 170 mm |
| Length of Cut | 260 mm |
| Slice Thickness | 0 - 13 mm |
| Blade Speed | 310 RPM |
| Angle of Feed | 45° |
| Motor Power | 250 Watts |
| Net Weight | 19 kg |
| | |



Model NS300HD

| Blade Diameter | 300 mm |
|-----------------|-----------|
| Height of Cut | 220 mm |
| Length of Cut | 290 mm |
| Slice Thickness | 0 - 14 mm |
| Blade Speed | 300 RPM |
| Angle of Feed | 45° |
| Motor Power | 370 Watts |
| Net Weight | 29 kg |



Model NS350HD

| Blade Diameter | |
|-----------------|--|
| Height of Cut | |
| Length of Cut | |
| Slice Thickness | |
| Blade Speed | |
| Angle of Feed | |
| Motor Power | |
| Net Weight | |

| 350 mm |
|-----------|
| 250 mm |
| 290 mm |
| 0 - 14 mm |
| 300 RPM |
| 45° |
| 370 Watts |
| 36 kg |



Manual Gravity Feed Slicers - Medium Duty

- Manual carriage operation
- Medium duty construction for smaller shops and moderate volumes
- Belt driven

Three medium-duty, manual gravity-feed slicers are available featuring a compact one-piece anodized aluminium body and built in sharpening head and blade ring-guard. The slicer disassembles quickly without the need of tools for easy cleaning.

This series is designed for smaller shops, deli's, cafes and restaurants with shorter runs and will slice a variety of product with ease and offer many years of dependable service.

Model NS220

| Blade Diameter | 220 mm |
|-----------------|-----------|
| Height of Cut | 155 mm |
| Length of Cut | 220 mm |
| Slice Thickness | 0 - 13 mm |
| Blade Speed | 290 RPM |
| Angle of Feed | 70° |
| Motor Power | 180 Watts |
| Net Weight | 14.5 kg |



Model NS250

| Blade Diameter | 250 mm |
|-----------------|-----------|
| Height of Cut | 170 mm |
| Length of Cut | 220 mm |
| Slice Thickness | 0 - 13 mm |
| Blade Speed | 290 RPM |
| Angle of Feed | 70° |
| Motor Power | 180 Watts |
| Net Weight | 16 kg |

Model NS300

| Blade Diameter | 300 mm |
|-----------------|-----------|
| Height of Cut | 220 mm |
| Length of Cut | 260 mm |
| Slice Thickness | 0 - 13 mm |
| Blade Speed | 310 RPM |
| Angle of Feed | 45° |
| Motor Power | 250 Watts |
| Net Weight | 20 kg |







Features - All Models



Precise slice thickness adjustment knob, graduated in millimetres.



Built in sharpening head with durable aluminium cover on all models. Style varies between models.



Rear blade deflection cover for consistent product positioning and cleaner operation. Style varies between models.



Spiked meat grip for firm control of food product. Style varies between models.



Full blade edge ring-guard for complete protection even while cleaning. Style varies between models.



Features - Specific by Model

Medium Duty Slicers



Heavy Duty Slicers



Fully Automatic Slicer

Semi-automatic Slicer


SLADE D CARRAGE D COUNTER D COUNTER

Electronic control panel for automatic operation.



Simple electronic control panel for semi-automatic operation.

All Angled Slicers



Tough clear Plexiglass guard with lip to protect fingers and contamination from sneezing.

Vertical Slicers



NS300V and NS330M - feature double sliding plate with lockable hand grip to securely hold meat in place.

Premium Fully Automatic Slicer - NS350HDX




Premium model NS350HDX is available with factory fitted speedy blade remover guard.




Dimensions

All dimensions are nominal and horizontal dimensions show full carriage movement.

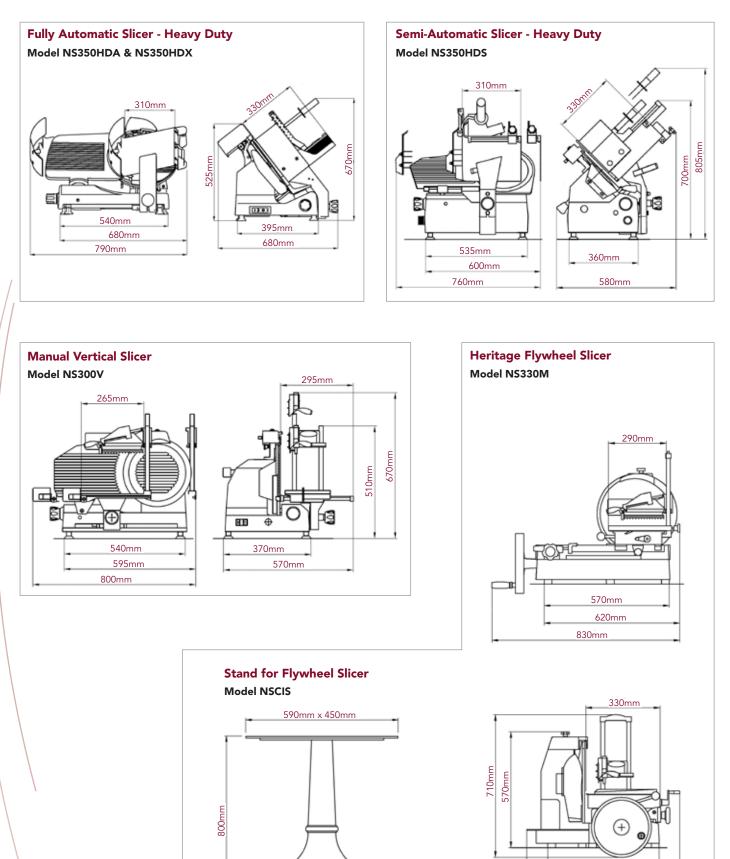

400mm 650mm



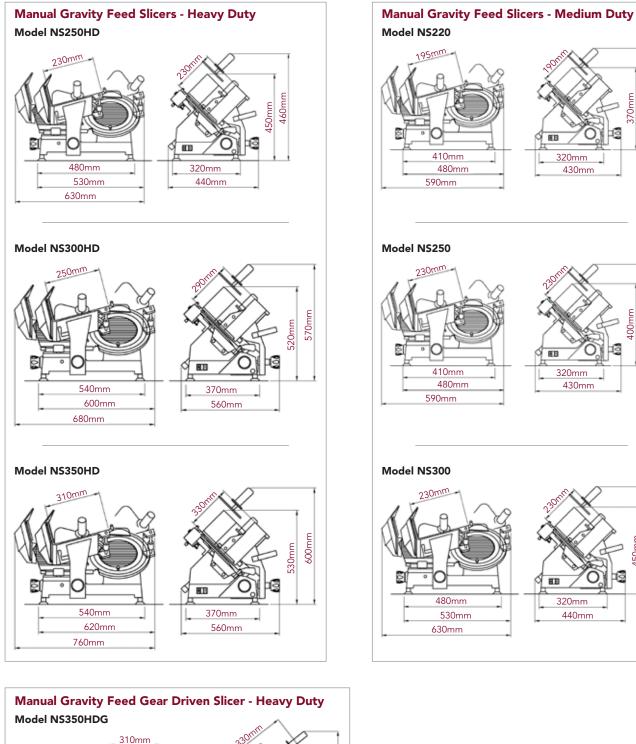

525mm

540mm

790mm

680mm

670mm


ğ

O

[]]]

395mm

680mm

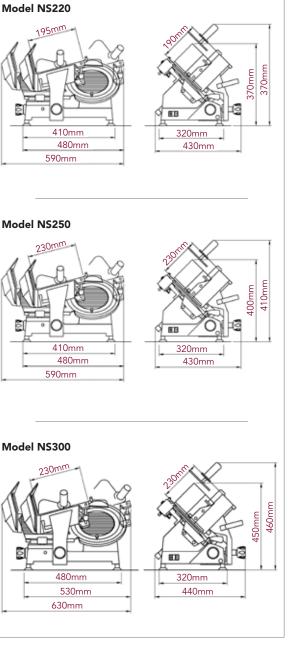





Features & Specifications

| DESCRIPTION | | MEDIUN | M DUTY MANUA | AL FEED | HEAVY DUTY MANUAL FEED | | |
|----------------|-----------------------|--------------------------------|-----------------|-----------|--|----------------|-----------|
| | MODEL NUMBER | NS220 | NS250 | NS300 | NS250HD NS300HD NS350HD | | |
| þ | Type of Establishment | • Restaurants | • Smaller shops | • Delis | • Restaurants | • Supermarkets | • Delis |
| Suited to | Output | Smaller volume | | | Moderate volume | | |
| | Types of foods | Variety of medium weight meats | | | Wide variety of heavy to medium weight meats | | |
| | Machine duty | Medium | Medium | Medium | Heavy | Heavy | Неаvy |
| uc | Operation | Manual | Manual | Manual | Manual | Manual | Manual |
| Operation | Carriage movement | Manual | Manual | Manual | Manual | Manual | Manual |
| | Angle of feed | 70° | 70° | 45° | 45° | 45° | 45° |
| | Drive transmission | Belt | Belt | Belt | Belt | Belt | Belt |
| | Blade diameter | 220 mm | 250 mm | 300 mm | 250 mm | 300 mm | 350 mm |
| | Height of cut | 155 mm | 170 mm | 220 mm | 170 mm | 220 mm | 250 mm |
| | Length of cut | 220 mm | 220 mm | 260 mm | 260 mm | 290 mm | 290 mm |
| suo | Slice thickness | 0 - 13 mm | 0 - 13 mm | 0 - 13 mm | 0 - 13 mm | 0 - 14 mm | 0 - 14 mm |
| Specifications | Blade speed | 290 RPM | 290 RPM | 310 RPM | 310 RPM | 300 RPM | 300 RPM |
| Spec | Motor power | 180 Watts | 180 Watts | 250 Watts | 250 Watts | 370 Watts | 370 Watts |
| | Current | < 2 Amps | < 2 Amps | < 2 Amps | < 2 Amps | < 2 Amps | < 2 Amps |
| | Voltage (AC) | 230 V | 230 V | 230 V | 230 V | 230 V | 230 V |
| | Net weight | 14.5 kg | 16 kg | 20 kg | 19 kg | 29 kg | 36 kg |
| | | Page 7 | Page 7 | Page 7 | Page 6 | Pare 6 | Page 6 |
| | | Page 7 | Page 7 | Page 7 | Page 6 | Page 6 | Page 6 |

| MANUAL VERTICAL SLICER | MANUAL GRAVITY FEED GEAR DRIVEN SLICER | SEMI-AUTOMATIC FULLY AUTOMATIC SLICER SLICER | | HERITAGE FLYWHEEL SLICER |
|--|--|--|--|---|
| NS300V | NS350HDG | NS350HDS NS350HDA/X | | NS330M |
| RestaurantsSupermarketsDelis | Large restaurants Supermarkets Delis Butchers | Large restaurants Supermarkets Delis Butchers | Large restaurants Supermarkets Delis Butchers | Showpiece machine for artisan delis and restaurants |
| For high volume | For high volume | For high volume | For high volume | Smaller output for delicate cold cuts |
| Shaving & slicing delicate cold cured meats and handles thick cheese | Wide variety of heavy to medium weight meats. Machine can cut very thick slices | Wide variety of heavy to medium weight meats | Wide variety of heavy to medium weight meats | Shaving prosciutto or very fine cold cut meats |
| Heavy | Неаvy | Неаvy | Heavy | Heavy |
| Manual | Manual | Semi-automatic, basic electronic selector | Fully automatic, electronic selector with slice counter device | Manual |
| Manual | Manual | Two-speed, three length options | Variable speed and length | Manual - carriage moves inwards proportionately to flywheel rotation |
| 90° (straight) | 52° | 52° | 45° | 90° (straight) |
| Belt | Gear | Belt | Belt | Manual gear |
| 300 mm | 350 mm | 350 mm | 350 mm | 330 mm |
| 210 mm | 250 mm | 230 mm | 260 mm | 215 mm |
| 290 mm | 365 mm | 250 mm | 330 mm | 270 mm |
| 0 - 14 mm | 0 - 22 mm | 0 - 14 mm | 0 - 14 mm | 0 - 4 mm |
| 310 RPM | 210 RPM | 300 RPM | 210 - 280 RPM | NA |
| 370 Watts | 370 Watts | 390 Watts | 570 Watts | NA |
| < 2 Amps | < 2 Amps | < 2 Amps | < 3 Amps | NA |
| 230 V | 230 V | 230 V | 230 V | NA |
| 31 kg | 42 kg | 46 kg | 50 kg | 62 kg + 80 kg (optional stand model NSCIS) |
| | | | | |

Page 4







Page 2



Page 5

Page 4

Page 3



NOAW is a registered trademark of Roband Australia Pty Ltd.

Roband Australia Pty Ltd, 1 Inman Road, Cromer, NSW 2099 Australia Tel: +61 2 9971 1788 Fax: +61 2 9971 1336 Email: sales@roband.com.au Roband New Zealand Ltd, Greenmount Drive, East Tamaki, New Zealand Tel: +64 9 274 1355 Fax: +64 9 274 1356 Email: roband@roband.co.nz

Exclusively distributed and serviced in Australia by:



All images and logos remain the intellectual property of Roband Australia and are subject to copyright laws throughout Australia and overseas. This document may not be copied, in part or in its entirety, without the written permission of Roband Australia. All rights reserved.

Distributor:

All machines are manufactured to run at 230 Volts Single Phase 50Hz. All dimensions are nominal only. All information contained in this brochure should serve as a guide only and is subject to change without notice due to constant research and development.

*All machines are covered by a 24 month warranty subject to our Terms and Conditions of Trade.

0313